


Gaskets With Fluid Seal

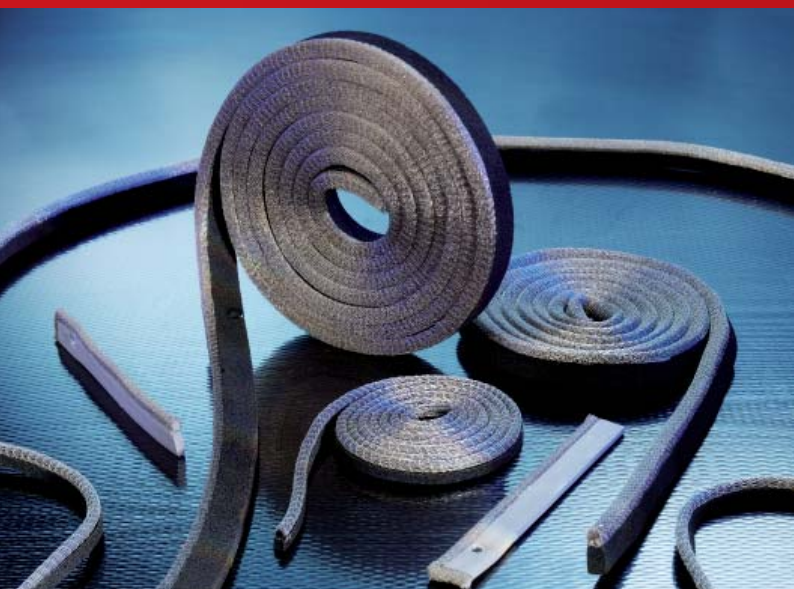

Description:

Knitex[®] gaskets with fluid seal are designed to provide high levels of EMI shielding effectiveness combined with the ability to provide a fluid and dust seal. Constructed from either a knitted all metal wire mesh resilient gasket or knitted wire elastomer covered gasket attached to an elastomeric section to give the fluid and dust seal. It is available in two styles as illustrated in the tables below. The standard material for the fluid seal is neoprene, which can be adhesive backed for ease of installation, or as an alternative silicone sponge is also available.

Application

Shielding gaskets with fluid seals are frequently used to seal enclosure lids and doors, removable cover plates and interface gaskets for vent panels and windows. Compression should be limited to between 25% and 35% of gasket nominal height and compression stops can be fitted if required. When installing the gasket, the neoprene or silicone seal should be facing the weather edge of the box or enclosure.

Materials of Construction - Wires

Knitex EMI shielding materials can be manufactured from any metal that can be drawn into a filament. However the majority of shielding requirements can be satisfied by using the materials listed in the table below.

Material	Wire Diameter	Material Ref.
Monel (BS 3075-NA13)	0.11mm	MO
Tin Plated Copper Clad Steel (SN-FE-CU)	0.11mm	SN-FE-CU
Stainless Steel (AISI 304)	0.11mm	SS
Tinned Copper (BS 4109 with 0.7-1 micron tin plate)	0.11mm	TC
Silver Clad Copper (BS 4190 with 0.7-1 micron silver cladding)	0.12mm	SCC
Nickel Plated Copper	0.15mm	NI-CU
Aluminium (ALMG5)	0.14mm	AL
Copper (BS 4109)	0.12mm	CO

Other materials are available to special order such as Phosphor Bronze and Brass.

Knitted Wire Gaskets Gaskets With Fluid Seal




Materials of Construction - Elastomer

Material	Temperature Range	Colour
Neoprene Sponge	-30°C to +100°C	Black
Silicone Sponge	-60°C to +200°C	Cream
Silicone Tube	-60°C to +260°C	Grey

General tolerances on gasket dimensions +/- 0.8mm. Further details on application.


Circular Section EMI/RFI Gasket with Fluid Seal



EMI/RFI Shielding Gasket Core Diameter	Neoprene Fluid Seal Gasket Dimension	Elastomer Core Material	Part Number
A (mm)*	B (mm)	-	-
3	3.5	Silicone Tube	8214
4	5	Silicone Tube	8211
5	6	Silicone Tube	8213

* Core dimensions specified do not include thickness of mesh layers.

All Metal Rectangular Section EMI/RFI Gasket with Fluid Seal



EMI/RFI Shielding Gasket Core Diameter		Neoprene Fluid Seal Gasket Dimension		Part Number
A (mm)	B (mm)	A (mm)	C (mm)	-
2	3	2	6	8751
2	3	2	9	8752
2	3	2	12	8753
2	3	2	15	8754
3	3	3	6	8755
3	3	3	9	8756
3	3	3	12	8757
3	3	3	15	8758
3	3	3	19	8759
3	4	3	6	8760
3	5	3	6	8761
3	6	3	6	8762
3	6	3	12	8763
3	6	3	19	8764
3	13	3	12	8765
5	3	5	6	8766
5	3	5	9	8767
5	3	5	12	8768
5	3	5	15	8769
5	6	5	15	8770
5	6	5	19	8771
6	3	6	6	8772
6	3	6	9	8773
6	3	6	12	8774
6	3	6	15	8775
6	6	6	19	8776
9	6	9	12	8777
9	6	9	15	8778
9	6	9	19	8779

General tolerances on gasket dimensions +/- 0.8mm. Further details on application.

Knitted Wire Gaskets

Gaskets With Fluid Seal

The Knitex logo features the word "Knitex" in a bold, red, sans-serif font with a registered trademark symbol (®) to the upper right. The logo is set against a white rectangular background.

Additional Information

Samples are available generally free of charge (please contact the sales department). Delivery lead times are quantity dependant but emergency deliveries can be organised within a few days or less. If a fabricated picture frame style gasket is required, please supply a detailed dimensioned drawing to enable us to quote for your requirements.

Ordering

To order, simply state the quantity required, part number, material reference, whether an adhesive back is required and if you have any special roll length or packaging requirements.

Example of how to order a standard Knitex gasket:

Gasket Type 8756 / AL = a 3mm thick x 3mm wide all metal aluminium gasket attached to a 3mm thick x 9mm wide neoprene sponge. (Gasket overall dimensions 3mm thick x 12mm wide). No adhesive backing on neoprene.

Quality Assurance

KnitMesh Technologies® is accredited to:

ISO9001:2008, ISO14001:2004, OHSAS18001:2007, PAS 99:2006 and ISO/TS 16949:2009



Customer Support

KnitMesh Technologies

Greenfield, Flintshire, United Kingdom CH8 9DP

T +44 (0) 1352 717 600 **F** +44 (0) 1352 714 909 **E** sales@knitmeshtechnologies.com

Issue No 02 (02/11)

The information provided above is supplied in good faith and believed to be correct. This information is supplied upon the condition that persons receiving this will make their own determination as to its suitability for their purposes prior to use. KnitMesh makes no representations or warranties, either expressed or implied with respect to the information or the product to which this information refers.



www.knitmeshtechnologies.com